
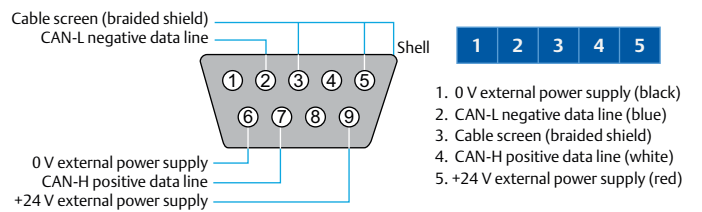


SM-DEVICENET

- Up to 62 nodes on a network
- Data rates up to 500 kbps (detected automatically)
- Cyclic data sizes of up to 28 words in/out
- Non-cyclic access supported using explicit data channel
- Vendor independent assembly objects for basic, extended speed and torque control



	SM-DEVICENET		
	Mentor MP Quantum MP	Unidrive SP	Digitax ST
	✓	✓	✓



- | | | | | |
|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 |
|---|---|---|---|---|

1. 0 V external power supply (black)
2. CAN-L negative data line (blue)
3. Cable screen (braided shield)
4. CAN-H positive data line (white)
5. +24 V external power supply (red)